

QUAD



DATE	PROJECT	FIRM	FIXTURE TYPE



QUAD - UNLIT

Quad is designed to ground a space with its unique form that balances planar structure with steady curves. It is made entirely of PET materials and carefully constructed with no metal or rigid frame. Quad is offered with a useful range of sizes and configurations, making it an ideal product to marry solutions of lighting design and acoustic performance. Its aesthetically elegant radius not only creates visual balance but, due to Sabin's signature sewn construction, eliminates the multiple parts, extra processes, and complex assembly that are usually required to achieve this rounded edge and unique shape.

SPECIFICATIONS

SERIES	LENGTH/WIDTH 1,4	HEIGHT ¹	EXTERIOR CO	DLOR ⁶	
QUD-U	12" (300MM) 24" (600MM) 35" (900MM) 47" (1200MM) CLW ²	19" (475MM) 24" (600MM) 33" (850MM) 55" (1350MM) 112" (2850MM) CH ³	15BR BEETROOT 15BS BISQUE 15CN CANARY 15FL FLINT 15GF GULF 15HZ HAZEL 15JD JADE 15MY MERCURY 15MS MOSS	150B OBSIDIAN 15PN PINE 15PM PUMICE 15QY QUARRY 15SP SAPPHIRE 15SD SAND 15SF SAFFRON 15SA SIENNA 15WS WISTERIA	
INTERIOR COL	OR		TRIM COLOR	(OPTIONAL PREI	MIUM FINISH)
15BR BEETROOT 150B OBSIDIAN 15BS BISQUE 15PN PINE 15CN CANARY 15PM PUMICE 15FL FLINT 15QY QUARRY 15GF GULF 15SP SAPPHIRE 15HZ HAZEL 15SD SAND 15JD JADE 15SF SAFFRON 15MY MERCURY 15SA SIENNA 15MS MOSS 15WS WISTERIA		NT NO TRIM AZ AZURE BF BLUFF CY CLAY CT CITRUS CU CURRANT DU DUNE EM EMERALD FE FERN	FR FROST HI HIBISCUS IN INDIGO IR IRIS LM LIME OL OLIVE OX ONYX PO POPPY SG SAGE	SH SHELL SK SKY SL SLATE SP SPRUCE ST STONE TM TIMBER WH WHITE	
36SLV 36" (915Ml 60BK 60" (1524N 60SLV 60" (1524N 120BK 120" (3048	M) BLACK AC CABLE M) SILVER AC CABLE MM) BLACK AC CABLE MM) SILVER AC CABLE BMM) BLACK AC CABLE BMM) BLACK AC CABLE BMM) SILVER AC CABLE	T-BAR CADDY CLIP, 15/16" TEGULAR CADDY CLIP, 9/16" TEGULAR CADDY CLIP, 15/16"			

IMPERIAL DIMENSIONS ARE NOMINAL. ACTUAL DIMENSIONS ARE METRIC.
 CUSTOM LENGTHS AND WIDTHS AVAILABLE BETWEEN 12" - 47" (300-1200MM).
 CUSTOM HEIGHTS AVAILABLE BETWEEN 19" - 112" (475-2850MM).
 QUAD IS ALWAYS SQUARE. CHOSEN DIMENSION APPLIES TO BOTH LENGTH AND WIDTH.
 CANOPIES AVAILABLE UPON REQUEST.

SEE ADDITIONAL OPTIONS FOR SIZE, TRIM FINISH, AND CUSTOMIZATION AT SABIN.BUILD







⁶ CUSTOM THREAD COLORS AVAILABLE. CONSULT FACTORY.



DATE	PROJECT	FIRM	FIXTURE TYPE

SWATCHES

Quad utilizes 1.5mm felt and has the option to add trim and customize color for cable and thread — and cord (for lit fixtures.)

Contact the factory for additional color options.

1.5MM FELT



TRIM (OPTIONAL PREMIUM FINISH)



CABLE



Colors are subject to slight variation from your screen or paper to the finished product.









DATE	PROJECT	FIRM	FIXTURE TYPE

ACOUSTIC PERFORMANCE DATA

ALL SABIN PRODUCTS ARE SUBJECT TO ACOUSTIC TESTING. PERFORMANCE VALUES WILL VARY BASED ON INSTALLATION FACTORS SUCH AS DENSITY AND MOUNTING HEIGHT.

SABINS

A SABIN IS A UNIT OF SOUND ABSORPTION DEFINED AS THE AMOUNT OF SOUND ABSORBED BY ONE SQUARE FOOT OF A PERFECT ABSORBER. IT WAS INITIALLY CONCEIVED AS THE EQUIVALENT OF 1 SQUARE FOOT OF OPEN WINDOW, REFLECTING NO SOUND BACK INTO THE INTERIOR. SABINS ARE USED TO EXPRESS THE TOTAL EFFECTIVE ABSORPTION FOR THE INTERIOR OF A ROOM, THIS CHART INDICATES AVERAGE SABINS PER UNIT AT THE NOTED FREQUENCIES WHICH REPRESENT THE TYPICAL RANGE OF HUMAN SPEECH OF 200-2500 HZ.

NRC


NOISE REDUCTION COEFFICIENT (NRC) IS A SINGLE NUMBER VALUE RANGING FROM 0.0 TO 1.0 THAT DESCRIBES THE AVERAGE SOUND ABSORPTION PERFORMANCE OF A MATERIAL. AN NRC OF 0.0 INDICATES THE OBJECT DOES NOT ABSORB MID-FREQUENCY SOUND ENERGY, BUT REFLECTS IT. AN NRC OF 1.0 INDICATES THAT THE SOUND ABSORPTION PERFORMANCE OF THE MATERIAL IS EQUAL TO ITS SURFACE AREA (MEASURED IN UNITS SABIN), OR CONCEPTUALLY 100% SOUND ABSORPTION.

PROJECTED NRC = .95

TOTAL SOUND ABSORPTION WILL VARY BASED ON DESIGNED PRODUCT CONFIGURATION. SABIN TESTS ALL PRODUCTS IN MULTIPLE CONFIGURATIONS. PLEASE CONTACT SABIN OR YOUR LOCAL AGENT FOR MORE INFORMATION.

SABIN QUAD FAMILY


PROJECTED ACOUSTIC PERFORMANCE

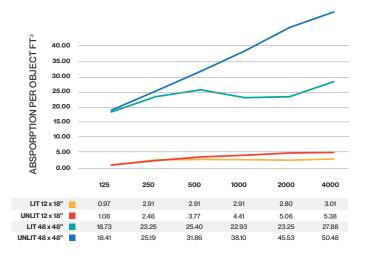

DIMENSIONS + WEIGHT

QUD-U 12" (300MM) 19" (475MM) 24" (600MM) 24" (600MM) 35" (900MM) 33" (850MM) 47" (1200MM) 55" (1350MM) CLW ² 112" (2850MM) CH ³	

- 1 IMPERIAL DIMENSIONS ARE NOMINAL. ACTUAL DIMENSIONS ARE METRIC.
- 2 CUSTOM LENGTHS AND WIDTHS AVAILABLE BETWEEN 12" 47" (300-1200MM.
 3 CUSTOM HEIGHTS AVAILABLE BETWEEN 19" 112" (475-2850MM).
 4 QUAD IS ALWAYS SQUARE. CHOSEN DIMENSION APPLIES TO BOTH LENGTH AND WIDTH.
- * ALL STANDARD DIMENSIONS ARE ECO-CONSCIOUS, MAXIMIZING MATERIAL USE AND MINIMIZING WASTE. CUSTOM DIMENSIONS RESULT IN EXCESS MATERIAL WASTE.

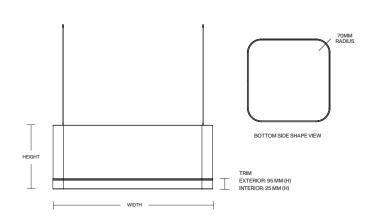

See Dimensions and Weight Table for Limitations

WEIGHT

PLEASE CONSULT THE FACTORY FOR PRODUCT WEIGHTS BASED ON CONFIGURATION AND PART NUMBERS.





DATE	PROJECT	FIRM	FIXTURE TYPE

ACOUSTIC MATERIAL

OUR 1.5MM AND 9MM PET (POLYESTER) FELT PANELS CONTAIN MINIMUM 60% POST-CONSUMER RECYCLED POLYESTER STAPLE FIBER. THE MATERIAL IS MOISTURE RESISTANT, FIRE RATED AND RECYCLABLE. THE POROUS MATERIAL IS AN OUTSTANDING ABSORBER OF ACOUSTIC ENERGY.

- FIRE RETARDANT: ASTEM E84 CLASS A, EN13501 CLASS B
- DECORATIVE: 16 STANDARD COLORS
 CONSTRUCTION: 100% POLYESTER FIBER (PET)

CONSTRUCTION

A HIGHLY ENGINEERED, ROBUST ACOUSTIC LUMINAIRE COMPRISED OF ≥ 60% RECYCLED PET MATERIAL UTILIZING SEWN CONSTRUCTION TO MAXIMIZE STRENGTH, DURABILITY AND SOUND ABSORBENCY.

CARE

PET ACOUSTICS: REMOVE DUST WITH COMPRESSED AIR, A VACUUM OR LINT ROLLER. ALUMINUM & POLYMER COMPONENTS: REMOVE DUST AND DEBRIS WITH A CLEAN, DRY, OR DAMP LINT-FREE CLOTH.

MOUNTING

SUSPENDED WITH 1/16" (1.6MM) AIRCRAFT CABLES, COLOR MATCHING CABLE AND GRIPPERS, INSTALLED AT FACTORY. AIRCRAFT CABLES AVAILABLE IN PRECUT LENGTHS OF 36" (915MM), 60" (1524MM), OR 120" (3048MM) WITH FABRIC-COVERED POWER CORD AND 5" (125MM) CANOPY.

CERTIFICATES/LISTING

TESTED IN ACCORDANCE WITH NEC, ANSI/NFPA 70 STANDARDS. ETL LISTED FOR DRY LOCATIONS, IP20, ROHS COMPLIANT,

WARRANTY

FIXTURE RATED FOR OPERATION IN CONDITIONED ENVIRONMENTS UP TO 77°F (25°C). FIXTURE IS WARRANTIED TO BE FREE FROM DEFECTS AND/OR FAILURE UNDER NORMAL USE AND PROPER STORAGE FOR FIVE (5) YEARS FROM DATE OF SHIPMENT.